



- 1600, 2100, 2500 mm measuring lengths
- Robust stainless steel measuring wire
- Delrin housing
- Potentiometric output
- IP40 protection class
- Compact design and easy mounting
- 2 m/s maximum movement speed
- Shock/vibration resistant


### MECHANICAL DATA

Measuring Lengths (stroke)	1600, 2100, 2500 mm (ask for others)
Max. Movement speed	2 m/s
Required Force	5 N
Protection class	IP40
Operating Temperature	-25°C...+85°C
Material	Body: Delrin
	Measuring wire: Stainless steel
Weight	~660 gr

### ELECTRICAL DATA

Measuring principle	Potentiometric
Supply voltage	42V max.
Signal output type	Potentiometric
Resistance	5 K $\Omega$ (standard), 10 K $\Omega$
Linearity	$\pm 0.5$ FS



### MECHANICAL DIMENSIONS (mm)

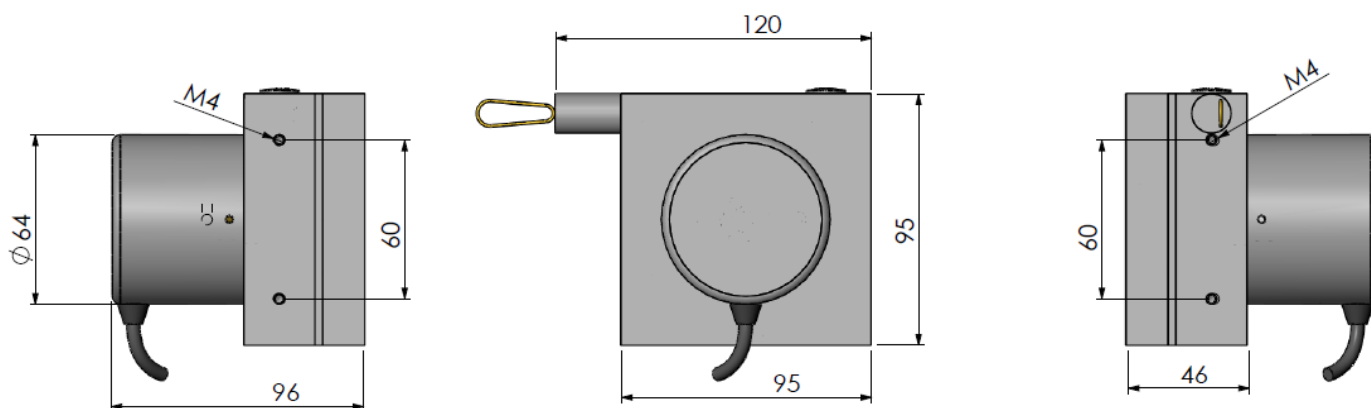

## ELECTRICAL CONNECTIONS


Never make or undo electrical connections to the sensor when voltage is applied, otherwise this may result in damage to devices.

Signal	Cable	M12/5 Pin Male Connector
Earth	Silver	Pin 1
+V	Red	Pin 2
0V	Black	Pin 3
Pot signal	Yellow	Pin 4
N/C	N/C	Pin 5

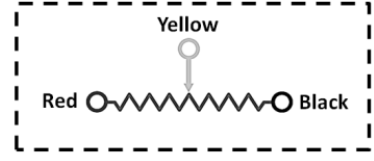

## WARNING

Never release the wire after pulling. Otherwise, the coil spring will be damaged.

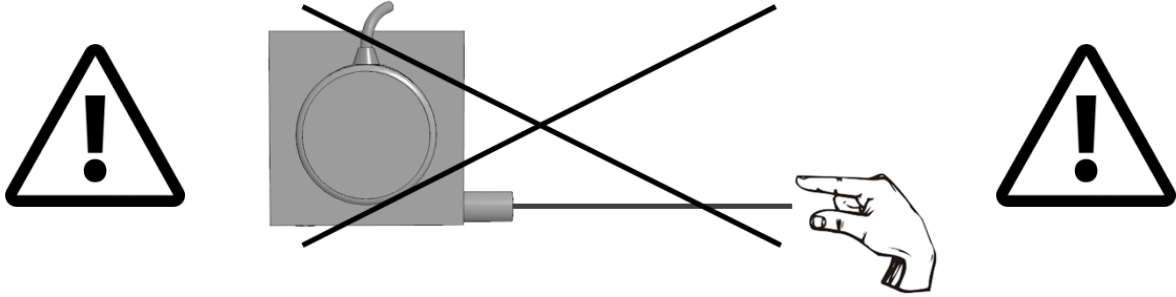

## ORDER CODE

Model		Resistance	
		5K: 5 K $\Omega$ (standard)	
		10K: 10 K $\Omega$	
AWP116	-	XXXX	- XX
Measuring Length		Electrical Connection	
1600: 1600 mm		3M : 3 m cable (std)	
2100: 2100 mm		5M : 5 m cable	
2500: 2500 mm		10M : 10 m cable	
*Ask for other lengths		S13M : M12 5 pin male socket	

Atek Elektronik Sensör Teknolojileri Sanayi ve Ticaret A.Ş.



Gebze OSB, 800. Sokak, No:814 Gebze/KOCAELİ/TURKEY



Tel: +90 262 673 76 00



Fax: +90 262 673 76 08



www.ateksensor.com



info@ateksensor.com